


1. European Wire Rope Thimble

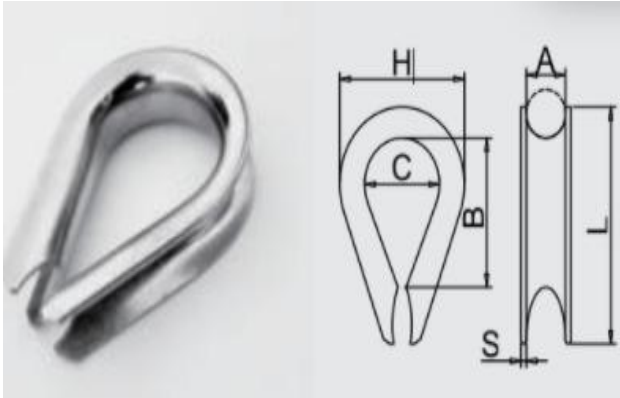


Rope (Diameter) A/mm	B/mm	C/mm	H/mm	S/mm	L/mm	WT/kg
2	14	7	11.5	0.8	20	0.001
3	16	10	16	0.8	23	0.002
4	18	11	17	1	25	0.003
5	22	12.5	20	1	32	0.005
6	25	14	22	1	37	0.007
8	34	18	29	1.5	48	0.017
10	43	24	37	1.5	56	0.026
12	48	27.5	42	1.5	67	0.04
14	50	33	50	2	72	0.06
16	64	38	55	2	85	0.079
18	68	41	61	2.5	93	0.124
20	72	43	65	2.5	101	0.143
22	77	43	67	2.5	106	0.172
24	77	49	73	2.5	110	0.198
26	80	53	80	3	120	0.275
28	90	55	85	3	130	0.33
32	94	62	90	3	134	0.37

To Be Continued


2. Light Duty US Type Wire Rope Thimble

RMC

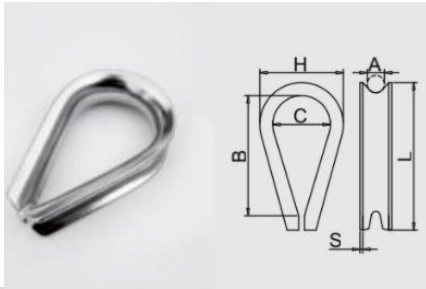

Rope (Diameter) Inch	B/Inch	C/Inch	H/Inch	S/Inch	L/Inch	WT/lbs
1/8	1.31	0.69	1.06	0.05	1.94	0.025
3/16	1.31	0.69	1.06	0.05	1.94	0.025
1/4	1.31	0.69	1.06	0.05	1.94	0.037
5/16	1.5	0.81	1.25	0.05	2.13	0.037
3/8	1.63	0.94	1.47	0.06	2.38	0.062
1/2	1.88	1.13	1.75	0.08	2.75	0.125
5/8	2.25	1.38	2.38	0.13	3.5	0.25
3/4	2.5	1.63	2.69	0.14	3.75	0.5
7/8	3.5	1.88	3.19	0.16	5	0.85
1	4.25	2.5	3.75	0.16	6.69	1
11/8-11/4	4.5	2.75	4.31	0.22	6.25	1.75

3. Heavy Duty US Type Wire Rope Thimble G414

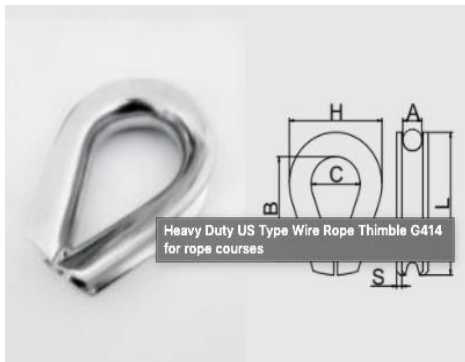

Rope (Diameter) Inch	B/Inch	C/Inch	H/Inch	S/Inch	L/Inch	WT/lbs
1/8	1.63	0.88	1.5	0.06	2.19	0.067
3/16	1.88	1.06	1.81	0.08	2.5	0.112
1/4	2.13	1.13	2.13	0.11	2.88	0.25
5/16	2.38	1.25	2.38	0.13	3.25	0.3
3/8	2.75	1.5	2.75	0.14	3.63	0.51
1/2	3.25	1.5	2.69	0.14	3.63	0.51
5/8	3.75	1.75	3.13	0.16	4.25	0.75
3/4	3.75	2	3.81	0.22	5	1.47
7/8	4.25	2.25	4.25	0.22	5.5	1.75
1	4.5	2.5	4.94	0.25	6.13	2.75
11/8-11/4	5.13	2.88	5.88	0.25	7	4